Sonic CutterZERD




"ZERO Stress" Complex shapes can be created as desired.

Sonic Cutter ZERD Series

Sonic Cutter ZERO is a high performance cutter applying ultrasonic vibration at a rate of 38,000 - 40,000 times per second. The easy to maneuver razor sharp cutting edge enables delicate work even on complicated shaped objects. Ultrasonic vibration provides a sleek and precise finish.

Improved visibility

The digital LED display on the controller clearly shows the status of the operating function. The Green LED on the handpiece will indicate whether the power is ON or OFF.



Lighter weight

The weight of the controller has been reduced by 46 % compared to the previous model. (Sonic Cutter: 2.6 kg → Sonic Cutter ZERO : 1.4 kg)

Overheat protection function

The overheat protection function enables continuous use. When a specified temperature is detected, the output will be automatically adjusted to suppress the temperature from rising.

If the excessive heat is detected, the controller will stop operating for safety.

Adapted the worldwide power supply, 100 - 240V








Reduction of heat level in handpiece

Improvements in the transducer achieved a lower heat level by 28.6 degrees Celsius maximum compared to the previous model.

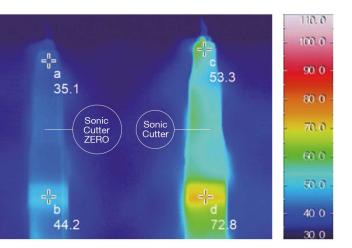

Ultrasonic

ULTRA-SONIC CUTTER

Sonic Cutter ZERD Set

- Especially effective for cutting complicated and precise shaping. (For cutting fabrics, latex, films, plastics, urethanes and PCB pattern retouching, etc.)
- Efficient for cutting, clipping and deburring of various thin materials.
- An accurate and sharp cut can be ensured as there are no annoying vibrations felt on the handpiece.



Standard equipment

•Controller : 1 pc. •Handpiece : 1 pc. •Spare blades (BDC-200P 30°) : 40 pcs. •Hexagon wrench (2 mm) : 2 pcs. •Spare set screws (M4 x P0.7 x L4) : 4 pcs. •Spare fuse (T1.6AH 250V) : 2 pcs. •O-ring: 1 pc. •Main power cord (2 m) : 1 pc.

(Plug type: 120V or 230V)

Code No.	[°] 7782	Model	US-40C Set 120V
Code No.	[°] 7783	Model	US-40C Set 230V

*Adapted the worldwide power supply, 100 - 240V. Please choose the plug type of main power supply cord.

Sonic CutterZERD

Sonic Cutter ZERO Controller

- Oscilation frequency 38 kHz 40 kHz and Max. output power 30 W achieves powerful cutting.
- A digital LED display indicates the watt and amplitude level clearly.
- LED display enhances visibility and prevention of misoperation.
- Heat protection function is equipped for a higher level of safety.

Specifications

Oscillation frequency : 38 kHz - 40 kHz Frequency control : Auto-tracking system Outputs : 30 W Output adjustment : 21 steps variable Rated input : AC 100 - 240V Dimentions : W161 x D256 x H84 mm Weight : 1.4 kg Power level indicator Standard accessories 🜔 UP key / DOWN key ●Spare fuse (T1.6AH 250V) : 2 pcs. ERROR / WATT Main power cord (2 m) : 1 pc. (Plug type : 120V or 230V) G Main power switch

Code No.	7785	Model	Sonic Cutter ZERO CONTROLLE
Code No.	7786	Model	Sonic Cutter ZERO CONTROLLE

*Adapted the worldwide power supply, 100 - 240V. Please choose the plug type of main power supply cord

Sonic Cutter ZERO Handpiece

- The vibration is not transmitted to the users' hand to enable a desired cutting result.
- Heat protection function enables continuous use without any concerns of overheating.
- Sonic Cutter ZERO handpiece performs sharp cutting and makes beautiful cutting surface.

Specifications

Oscillator : Bolt-clamped Langevin type Setting the blade: screwed the blade W4 mm x thickness 0.38 mm

Lenath of cord : 3 m Dimensions : Max. Ø 25 x L166 mm Weight: 120 g (excluding cable)

Standard accessories

●Spare blades (BDC-200P 30°): 40 pcs. Hexagon wrench (2 mm) : 2 pcs. •Spare set screws (M4 x P0.7 x L4) : 4 pcs. • 0-ring : 1 pc.



Sonic Cutter ZERO Spare Parts

Product	Code No.	
	8103	FC Fo
	BDC-200P	Sp Ma Sp





